



**Digital Video Broadcasting (DVB);  
Usage of the DVB test and measurement signalling channel  
(PID 0x001D) embedded in an MPEG-2 Transport Stream (TS)**

**DVB Document A046  
June 1999**

*Reproduction of the document in whole or in part without prior permission of the  
DVB Project Office is forbidden.*

# Contents

Intellectual Property Rights .....	3
1 Scope.....	4
2 References.....	4
3 Definitions and abbreviations.....	5
3.1 Definitions.....	5
3.2 Abbreviations .....	5
4 Introduction.....	6
4.1 Background.....	6
4.2 Summary of technical requirements.....	6
5 Syntax of PID 0x001D applications.....	7
5.1 Testdata section.....	7
5.2 Semantic definition of fields in testdata section.....	8
5.3 Definition of subtables .....	9
5.4 Descriptors .....	9
5.4.1 Descriptor coding.....	9
5.4.2 Elementary id descriptor .....	10
5.4.3 Content information descriptor.....	11
5.4.4 Source identifier descriptor.....	12
5.4.5 Test signal descriptor .....	12
5.4.6 Time reference descriptor.....	14
5.4.7 GPS_descriptor .....	16
5.4.8 "reduced PCR" descriptor.....	16
5.4.9 program_descriptor .....	17
5.5 Usage of adaptation fields within packets with PID 0x1D .....	17
<b>Annex A (informative): Detailed description of table content (testdata_byte) .....</b>	<b>18</b>
A.1 Network Status Table (NST) .....	18
A.1.1 Introduction.....	18
A.1.2 Functionality .....	18
A.1.3 Syntax of the Network Status Table (NST).....	18
<b>Annex B (informative): Examples of use for the test packets.....</b>	<b>25</b>
B.1 Example of Testdata structure for a measurement table.....	25
B.2 Example of Testdata structure for a Testsignal table .....	27
B.3 Example of Testdata structure for a Network Status Table (NST) .....	29
B.4 Example of Testdata structure for a Reception Status Table (RST) .....	29
B.5 Example of test data structure for a Remote Control Table (RCT).....	30
<b>Annex C (informative): Examples for data rates.....</b>	<b>34</b>
History.....	35

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.fr/ipr> or <http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

### **Digital Video Broadcasting (DVB) Project**

Founded in September 1993, the DVB Project is a market-led consortium of public and private sector organizations in the television industry. Its aim is to establish the framework for the introduction of MPEG-2 based digital television services. Now comprising over 200 organizations from more than 25 countries around the world, DVB fosters market-led systems, which meet the real needs, and economic circumstances, of the consumer electronics and the broadcast industry.

# 1 Scope

The present document proposes a syntax for the test and measurement Packet Identifier PID 0x1D.

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, subsequent revisions do apply.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] ISO/IEC 13818-1: "Information technology - Generic coding of moving pictures and associated audio information: Systems".
- [2] EN 300 468: "Digital Video Broadcasting (DVB); Specification for Service Information (SI) in DVB systems".
- [3] ETR 290: "Digital Video Broadcasting (DVB); Measurement guidelines for DVB systems".
- [4] EN 300 429: "Digital Video Broadcasting (DVB); Framing structure, channel coding and modulation for cable systems".
- [5] EN 300 421: "Digital Video Broadcasting (DVB); Framing structure, channel coding and modulation for 11/12 GHz satellite services".
- [6] EN 300 744: "Digital Video Broadcasting (DVB); Framing structure, channel coding and modulation for digital terrestrial television".
- [7] ISO/IEC 639-2: "Codes for the representation of names of languages -- Part 2: Alpha-3 code".
- [8] ISO/IEC 8859-1: "Information processing - 8-bit single-byte coded graphic character sets - Part 1: Latin alphabet No. 1".

The syntax of the Testdata contained in PID 0x001D is based on the structure of the Private section as defined in ISO/IEC 13818-1 [1].

A testdata table may be made of several testdata sections. Different testdata tables (for different applications) are specified by their table\_id and table\_id\_extension values.

One testdata table shall have only one priority level, so only complete tables may be replaced or removed.

The values for structure elements "table\_id" and "descriptor\_tag" may be user defined as specified in ISO/IEC 13818-1 [1].

In the PSI PMT table, the use of a specific descriptor would allow to precise if, for a given elementary stream, there is corresponding test data in the PID 0x1D stream.

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following definitions apply:

**MPEG-2:** refers to the standard ISO/IEC 13818 [1]. Systems coding is defined in part 1. Video coding is defined in part 2. Audio coding is defined in part 3.

**multiplex:** a stream of all the digital data carrying one or more services within a single physical channel.

**Service Information (SI):** digital data describing the delivery system, content and scheduling/timing of broadcast data streams etc. It includes MPEG-2 PSI together with independently defined extensions.

**Transport Stream (TS):** a TS is a data structure defined in ISO/IEC 13818-1 [1]. It is the basis of the ETSI Digital Video Broadcasting (DVB) standards.

### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BER	Bit Error Rate
bslbf	bit string, left bit first
CRC	Cyclic Redundancy Check
CW	Continuous Wave
DVB	Digital Video Broadcasting
DVB-C	Digital Video Broadcasting baseline system for digital cable television (EN 300 429)
DVB-S	Digital Video Broadcasting baseline system for digital satellite television (EN 300 421)
DVB-T	Digital Video Broadcasting baseline system for digital terrestrial television (EN 300 744)
EB	Errored Block
ES	Errored Second
EIT	Encoded Information Type
ETR	ETSI Technical Report
ETS	European Telecommunication Standard
IEC	International Electrotechnical Commission
IRD	Integrated Receiver Decoder
ISO	International Organisation for Standardisation
MMDS	Microwave Multi-point Distribution Systems (or Multichannel Multi-point Distribution Systems)
MPEG	Moving Picture Experts Group
MPTS	Multiple Presentation Time Stamps
MVDS	Multi-point Video Distribution Systems
NIT	Network Information Table
NST	Network Status Table
PCR	Program Clock Reference

PID	Packet Identifier
PTS	Presentation Time Stamps
QEF	Quasi Error Free
r.m.s	root mean square
RS	Reed Solomon
SDP	Severely Disturbed Period
SDT	Service Description Table
SES	Seriously Errored Second
SFN	Single Frequency Network
SPTS	Multiple Presentation Time Stamps
TDT	Target Designation Transmitter
TS	Transport Stream
TV	Television
UI	Unit Interval
uimsbf	unsigned integer, most significant bit first
UTC	Universal Time Co-ordinated

## 4 Introduction

### 4.1 Background

The Digital Video Broadcasting (DVB) set of digital TV standards specify baseline systems for various transmission media: satellite, cable, terrestrial, etc. Each baseline system standard defines the channel coding and modulation schemes for that transmission medium. The source coding adopted was from the MPEG-2 standard.

The design of these new systems has created a demand for a common understanding of measurement techniques and the interpretation of measurement results, this led to the introduction of the "DVB Measurement Guidelines" ETR 290 [3].

The deployment of complex digital broadcasting network architectures raised the following requirements:

- In order to make the test data independent of any PSI / SI table within a TS and to allow the packets to be freely defined without disturbing any current equipment, a specific PID from the DVB reserved range has been assigned. The number assigned was 0x1D.
- Test data may be inserted into an existing TS by replacing null packets with packets containing the test data with the assignment PID 0x1D. Alternatively test data may be introduced via a multiplexer in which case it is at the discretion of the multiplex operator to assign sufficient bandwidth to PID 0x1D. Annex A provides an indication of the likely bandwidth requirements for various applications.

### 4.2 Summary of technical requirements

The chosen solution allows for the following requirements:

- technical compatibility with MPEG / DVB standards to ensure that existing equipment will continue to work with transport streams containing PID 0x1D. This will also enable potential reduction of development effort to enable full support of PID 0x1D applications in future equipment implementations;
- support for all currently identified application areas;
- the provision should be made for user defined solutions to meet the private needs of network operators;
- simplification of the test data inserter and test data removal equipment;
- prioritization of test data to allow end-to-end communication across a network or the re-use of test data capacity within a network as appropriate to the application. The prioritization of test data packets shall allow their transmission within a network or across network operator borders.

## 5 Syntax of PID 0x001D applications

All table\_ids and descriptor\_tags defined in the present document are only valid in the context of packets with PID 0x1D.

### 5.1 Testdata section

Table 1 defines the structure for testdata sections, transmitted in transport streams with PID 0x001D.

**Table 1: Testdata section**

Syntax	No. of bits	Mnemonic
testdata_section() {		
<b>table_id</b>	<b>6</b>	<b>uimsbf</b>
<b>priority_level</b>	<b>2</b>	<b>uimsbf</b>
<b>section_syntax_indicator</b>	<b>1</b>	<b>bslbf</b>
<b>reserved</b>	<b>3</b>	<b>bslbf</b>
<b>testdata_section_length</b>	<b>12</b>	<b>uimsbf</b>
if (section_syntax_indicator == 0) {		
for (i=0; i< test_data_section_length; i++){		
<b>testdata_byte</b>	<b>8</b>	<b>uimsbf</b>
}		
}		
else {		
<b>user_defined</b>	<b>8</b>	<b>uimsbf</b>
<b>table_id_extension</b>	<b>8</b>	<b>uimsbf</b>
<b>reserved</b>	<b>2</b>	<b>bslbf</b>
<b>version_number</b>	<b>5</b>	<b>uimsbf</b>
<b>current_next_indicator</b>	<b>1</b>	<b>bslbf</b>
<b>section_number</b>	<b>8</b>	<b>uimsbf</b>
<b>last_section_number</b>	<b>8</b>	<b>uimsbf</b>
<b>reserved</b>	<b>4</b>	<b>bslbf</b>
<b>descriptors_length</b>	<b>12</b>	<b>uimsbf</b>
for (i=0; i<descriptors_length; i++){		
<b>descriptor()</b>		
}		
for (i=0; i< test_data_section_length - descriptors_length -11; i++){		
<b>testdata_byte</b>	<b>8</b>	<b>uimsbf</b>
}		
<b>CRC_32</b>	<b>32</b>	<b>rpchof</b>
}		
}		

## 5.2 Semantic definition of fields in testdata section

**table\_id:** This is a 6-bit field, the value of which identifies the type of testdata table this section belongs to (see also table 3).

**NOTE:** When using the PID 0x1D, the table\_id can be chosen from the whole range except the values reserved by MPEG. If the concept is implemented under another PID, further constraints for the choice of table\_id have to be considered.

**priority\_level:** This 2-bit field will be used for priority handling as specified in table 2.

**Table 2: Priority levels and description**

Priority Level	Description
0x00	low_priority, single hop testing, either transport or distribution
0x01	medium_priority, multiple hop testing, either transport or distribution
0x02	high_priority, transport path tests only, no distribution paths
0x03	super_priority, end-to-end testing, including both

**section\_syntax\_indicator:** When set to 1, it indicates that the testdata section follows the generic section syntax beyond the testdata\_section\_length field. When set to "0", it indicates that the testdata\_bytes immediately follow the testdata\_section\_length field.

**reserved:** This 3 bits shall all be set to 1.

**testdata\_section\_length:** A 12-bit field. It specifies the number of remaining bytes in the testdata section immediately following the testdata\_section\_length field up to the end of the testdata\_section. The value in this field shall not exceed 4 093.

**user\_defined:** This 8-bit field is user defined and may be used for any purpose.

**table\_id\_extension:** This 8-bit field is used for the table\_id\_extension. Use and values are defined as specified in table 3. The values 0x00 and 0xFF are reserved for future use.

**version\_number:** This 5-bit field is the version number of the testdata\_section. The version\_number shall be incremented by 1 modulo 32 when a change in the information carried within the testdata\_section occurs.

**current\_next\_indicator:** A 1-bit field, which shall be set to 1.

**section\_number:** This 8-bit field gives the number of the testdata\_section. The section\_number of the first section in a testdata table shall be 0x00. The section\_number shall be incremented by 1 modulo 256 with each additional section in this testdata table.

**last\_section\_number:** This 8-bit field specifies the number of the last section (that is, the section with the highest section\_number) of the testdata table of which this section is a part.

**reserved:** 4 bits which shall be set to "0".

**descriptors\_length:** A 12-bit field. It specifies the number of bytes in the descriptors immediately following the descriptors\_length field up to the start of Testdata bytes. The value in this field shall not exceed 4 082. The number of descriptors is user definable and can be zero or more.

**descriptor:** See table 4 for list of predefined descriptors. Users may add their own descriptors, where descriptor\_tags shall not be used twice.

**testdata\_byte:** One or more testdata bytes, to be defined. Informative examples for structures of testdata bytes are given in clause 5 at the end of the present document.



**CRC\_32:** This is a 32-bit field that contains the CRC value that gives a zero output of the registers in the decoder defined in annex B of ISO/IEC 13818-1 [1] after processing the entire testdata section.

## 5.3 Definition of subtables

Table 3 gives a summary of possible values for the table\_id and table\_id\_extension fields, used to identify the type of subtable (one or more sections) inside the Test-PID 0x1D.

**Table 3: Definition of subtables**

table_id	table_id_extension
<b>0x00 to 0x0F reserved</b>	not applicable
<b>0x10 measurement_table</b>	0x01 video_measurement
	0x02 audio_measurement
	0x03 transmission_measurement
	0x04 protocol_analysis
	0x05 to 0xFE <i>to be defined</i>
<b>0x11 test_signal_table</b>	0x01 PRBS
	0x02 to 0xFE <i>to be defined</i>
<b>0x12 remote_control_table</b>	0x01 measurement_system
	0x02 to 0xFE <i>to be defined</i>
<b>0x13 reception_status_table</b>	not applicable
<b>0x14 network_status_table</b>	not applicable
<b>0x15 to 0x3C DVB MG reserved</b>	DVB MG reserved
<b>0x3D User defined</b>	User defined
<b>0x3E DVB MG reserved</b>	DVB MG reserved
<b>0x3F reserved</b>	not applicable

## 5.4 Descriptors

The number of descriptor() is user definable and can be zero or more.

### 5.4.1 Descriptor coding

Following semantics apply to all the descriptors defined in this subclause.

**descriptor\_tag:** The descriptor tag is an 8-bit field which identifies each descriptor. Those values with MPEG-2 normative meaning are described in ISO/IEC 13818-1 [1]. The values of descriptor\_tag used for Test-PID 0x1D are given in table 4.

**Table 4: Descriptor identification**

<b>Descriptor</b>	<b>Tag Value</b>
elementary_id_descriptor	0x40
content_information_descriptor	0x41
source_identifier_descriptor	0x42
test_signal_descriptor	0x43
time_reference_descriptor	0x44
GPS_descriptor	0x45
reduced_PCR_descriptor	0x46
program_descriptor	0x47
to be defined	0x48 to 0xFE

**descriptor\_length:** The descriptor length is an 8-bit field specifying the total number of data bytes of the descriptor immediately following the descriptor\_length field.

#### 5.4.2 Elementary id descriptor

**Table 5: elementary\_id\_descriptor**

<b>Syntax</b>	<b>No. of bits</b>	<b>Mnemonic</b>
elementary_id_descriptor() {		
<b>descriptor_tag</b>	<b>8</b>	<b>uimsbf</b>
<b>descriptor_length</b>	<b>8</b>	<b>uimsbf</b>
<b>id_type</b>	<b>3</b>	<b>uimsbf</b>
if (id_type <= 3) {		
<b>elementary_stream_PID</b>	<b>13</b>	<b>uimsbf</b>
}		
else {		
<b>reserved_for_future_use</b>	<b>13</b>	<b>uimsbf</b>
}		
}		

**id\_type:** A 3-bit field. A value of lower than or equal to 3 indicates that the following datafield contains the PID of an elementary stream, for which measurement values (Video or Audio) are available (see table 5A). Values 0x4 to 0x7 are reserved for future use.

**Table 5A**

id_type	Value
0x0	user defined
0x1	for video stream
0x2	for audio stream
0x3	for data stream
0x4 to 0x7	reserved for future use

**elementary\_stream\_PID:** A 13-bit field, which contains the PID of an elementary stream, for which measurement values (Video or Audio) are available. The value 0x1FFF is forbidden (PID of null packets).

**reserved\_for\_future\_use:** A 13-bit field, which shall be set to 0x1FFF.

### 5.4.3 Content information descriptor

**Table 6: content\_information\_descriptor**

Syntax	No. of bits	Mnemonic
content_information_descriptor() {		
<b>descriptor_tag</b>	<b>8</b>	<b>uimsbf</b>
<b>descriptor_length</b>	<b>8</b>	<b>uimsbf</b>
<b>ISO_639_language_code</b>	<b>24</b>	<b>uimsbf</b>
for (i=0; i<N; i++) {		
<b>text_char</b>	<b>8</b>	<b>uimsbf</b>
}		
}		

**ISO\_639\_language\_code:** This 24-bit field contains the ISO/IEC 639-2 [7] three character language code of the language of the following content information. Both ISO 639-2/B or ISO 639-2/T may be used. Each character is coded into 8 bits according to ISO/IEC 8859-1 [8] and inserted into the 24-bit field.

EXAMPLE: French has 3 character code "fre", which is coded as "0110 0110 0111 0010 0110 0101"

**text\_char:** This is an 8-bit field. The string of character fields is user definable and has to be coded using character sets and methods described in annex A of EN 300 468 [2].

#### 5.4.4 Source identifier descriptor

This descriptor is used for identification of the source of Test data, inserted into Test-PID 0x1D. This identifier gives information concerning the location of insertion, provider and type of Testdata.

**Table 7: source\_identifier\_descriptor**

Syntax	No. of bits	Mnemonic
source_identifier_descriptor() {		
<b>descriptor_tag</b>	<b>8</b>	<b>uimsbf</b>
<b>descriptor_length</b>	<b>8</b>	<b>uimsbf</b>
for (i=0; i< descriptor_length / 2; i++) {		
<b>source_identifier_id</b>	<b>16</b>	<b>uimsbf</b>
}		
}		

**source\_identifier\_id:** This is an 16-bit field. It contains user definable codes for identification of Testdata insertion parameters. As an example, the source\_identifier\_id may contain codes for the insertion point and/or the provider of inserted Testdata.

The values 0x0000 and 0xFFFF are reserved and shall not be used.

#### 5.4.5 Test signal descriptor

This descriptor is used for identification of the type of the inserted testsignal and is intended use.

**Table 8: test\_signal\_descriptor**

Syntax	No. of bits	Mnemonic
test_signal_descriptor() {		
<b>descriptor_tag</b>	<b>8</b>	<b>uimsbf</b>
<b>descriptor_length</b>	<b>8</b>	<b>uimsbf</b>
<b>signal_type</b>	<b>1</b>	<b>uimsbf</b>
<b>intended_use</b>	<b>2</b>	<b>uimsbf</b>
<b>signal_id</b>	<b>13</b>	<b>uimsbf</b>
}		

**signal\_type:** The signal\_type is a single bit field to allow freedom in the definition of the test signals.

Signal\_type "0" is meant for "user defined" signals, while signal\_type "1" is intended for standardized signals to be defined by agreement in the present document.

**Table 9: Test signal\_id table (for signal\_type=0)**

Value	Description
0x0000	reserved
0x0001 to 0x1FFE	User defined
0x1FFF	reserved

**Table 10: Test signal\_id table (for signal\_type=1)**

Value	Description
0x000	reserved
0x001	Time Reference
0x002	PRBS #1
0x003	Pathological 1, Reverse of the energy dispersal for all "ones"
0x004	Pathological 2, Reverse of the energy dispersal for all "zeroes"
0x005	Pathological 3, Reverse of the energy dispersal for 8 pakets of all "ones" followed by 8 packets of all "zeroes".
...	Future use
0x3FF	reserved

**signal\_id:** The signal\_id is a fixed 13 bit field indicating the type of test signal. Up to 8 192 different test signals can be defined in each of the two types of signals.

**Table 11: Intended use table**

Value	Description
00	Undefined
01	In-service measurements
10	Out-of-service measurements
11	Both

**intended\_use:** The intended\_use is a two bit field used as an indicator of the appropriate use of the signal.

## 5.4.6 Time reference descriptor

This descriptor can be used as a reference for all test equipment to measure delays in the signal path.

**Table 12: time\_reference\_descriptor**

Syntax	No. of bits	Mnemonic
time_reference_descriptor() {		
<b>descriptor_tag</b>	<b>8</b>	<b>uimsbf</b>
<b>descriptor_length</b>	<b>8</b>	<b>uimsbf</b>
<b>reference_type</b>	<b>6</b>	<b>uimsbf</b>
<b>precision_range</b>	<b>2</b>	<b>uimsbf</b>
<b>UTC_time</b>	<b>40</b>	<b>uimsbf</b>
if (precision_range ==1) {		
<b>reserved</b>	<b>6</b>	<b>uimsbf</b>
<b>millisecond_extension</b>	<b>10</b>	<b>uimsbf</b>
}		
if (precision_range ==2) {		
<b>reserved</b>	<b>4</b>	<b>uimsbf</b>
<b>millisecond_extension</b>	<b>10</b>	<b>uimsbf</b>
<b>microsecond_extension</b>	<b>10</b>	<b>uimsbf</b>
}		
if (precision_range ==3) {		
<b>reserved</b>	<b>2</b>	<b>uimsbf</b>
<b>millisecond_extension</b>	<b>10</b>	<b>uimsbf</b>
<b>microsecond_extension</b>	<b>10</b>	<b>uimsbf</b>
<b>nanosecond_extension</b>	<b>10</b>	<b>uimsbf</b>
}		

**reference\_type:** This 6-bit field indicates the nature of the reference clock, so the receiver can contrast what is the best fit for the measurement. The use of a XCO (value 0), could not provide a good enough absolute time reference, however still can be an option of the test generator for measurements of delay in close loop systems, such as a terrestrial transmitter and a terrestrial reference receiver measured by a test generator-analyzer equipment used for transmitter delay measurements.

**Table 13: Reference\_type table**

Value	Description
0	Internal XCO of the test generator
1	GPS grade 1
2	GPS grade 2
3	Timing Reference Radio Station
4	Future use
5	Future use
6	$1 \times 10^{-6}$
7	$1 \times 10^{-7}$
8	$1 \times 10^{-8}$
9	$1 \times 10^{-9}$
10	$1 \times 10^{-10}$
11	$1 \times 10^{-11}$
12	$1 \times 10^{-12}$
...	Future use
63	Future use

**precision\_range:** A 2-bit field indicating the precision of the time reference used.

**UTC\_time:** This 40-bit field contains the current time and date in UTC and MJD (see annex C of EN 300 468 [2]). This field is coded as 16 bits giving the 16 LSBs of MJD followed by 24 bits coded as 6 digits in 4-bit BCD.

**millisecond\_extension:** This 10-bit field should contain a binary number indicating the number of milliseconds.

**microsecond\_extension:** This 10-bit field should contain a binary number indicating the number of microseconds.

**nanosecond\_extension:** This 10-bit field should contain a binary number indicating the number of nanoseconds.

NOTE: In GPS applications, the 10 MHz reference signal can be used for the generation of the time extension. The resolution of the extension should be given up to the nanosecond, however the increment can be made to tens of nanosecond or hundreds of nanosecond, depending on the reference accuracy.

### 5.4.7 GPS\_descriptor

**Table 14: GPS\_descriptor**

Syntax	No. of bits	Mnemonic
GPS_descriptor() {		
<b>descriptor_tag</b>	<b>8</b>	<b>uimsbf</b>
<b>descriptor_length</b>	<b>8</b>	<b>uimsbf</b>
<b>north_south</b>	<b>1</b>	<b>uimsbf</b>
<b>geo_latitude</b>	<b>23</b>	<b>uimsbf</b>
<b>east_west</b>	<b>1</b>	
<b>geo_longitude</b>	<b>23</b>	<b>uimsbf</b>
<b>geo_elevation</b>	<b>16</b>	<b>uimsbf</b>
}		
NOTE: This table may have to be reviewed.		

### 5.4.8 "reduced PCR" descriptor

When the "reduced PCR" descriptor is inserted in a table which contains a "time\_reference\_descriptor", the following assumption is made.

The "reduced PCR" field conveys the 32 most significant bits of the PCR\_base, referring to the TS packet arriving at the instant at which the time\_reference field is derived from the timing reference.

**Table 15: reduced\_PCR descriptor**

Syntax	No. of bits	Mnemonic
reduced_PCR_descriptor() {		
<b>descriptor_tag</b>	<b>8</b>	<b>uimsbf</b>
<b>descriptor_length</b>	<b>8</b>	<b>uimsbf</b>
<b>reduced_PCR_base</b>	<b>32</b>	<b>uimsbf</b>
}		



### 5.4.9 program\_descriptor

The program number and the PID number of the PMT can be indicated before "elementary\_id\_descriptor". Thus, the application can find easily complementary information in PSI/SI if needed.

**Table 16: program\_descriptor**

Syntax	No. of bits	Mnemonic
program_descriptor() {		
<b>descriptor_tag</b>	<b>8</b>	<b>uimsbf</b>
<b>descriptor_length</b>	<b>8</b>	<b>uimsbf</b>
<b>program_number</b>	<b>16</b>	<b>uimsbf</b>
<b>reserved</b>	<b>3</b>	<b>uimsbf</b>
<b>program_map_pid</b>	<b>13</b>	<b>uimsbf</b>
}		

## 5.5 Usage of adaptation fields within packets with PID 0x1D

Many applications using the packets with PID 0x1D will use **no adaptation field, payload only** (adaptation\_field\_control = "01"). Some applications however will use **adaptation field only, no payload** (adaptation\_field\_control = "10"). In this case, the first 4 bytes of the adaptation field should follow the syntax of the Transport Stream adaptation field (table 2-7 of ISO/IEC 13818-1 [1]) but with all indicators and flags set to "zero" with the exception of the transport\_private\_data\_flag which shall be set to "one".

The first private\_data\_byte of the adaptation field **of each packet** shall be an exact copy of the table\_id (6 bits) followed by the priority level (2 bits) as defined **above in** table 1 (test data section). The remaining 180 bytes, from section\_syntax\_indicator to CRC32, constitute the data bytes for all the table\_id defined in table 3 with the exception of table\_id = 0x3E which may be defined by DVB MG for future use.

By using this adaptation field, the type of application, as well as the priority level will be present in each test packet and will allow for individual processing of each packet reducing delays and memory buffers.

When adaptation\_field\_control = "10", Packet Unit Start Indicator shall be "1" if the transport packet carries the beginning of a test\_data\_section which can be distinguished by the following sequence: byte "table\_id / priority\_level", followed by 2 bytes "section\_syntax\_indicator / reserved / test\_data\_section\_length".

## Annex A (informative): Detailed description of table content (testdata\_byte)

### A.1 Network Status Table (NST)

#### A.1.1 Introduction

In a digital broadcast environment with a multitude of services there is a need for highly automated means to monitor and subsequently to provide information (e.g. failure messages) about the availability of equipment and services as well as of service components such as video, audio and subtitling and of Service Information (SI) tables.

In order to support the detection of service and equipment failures, to provide information for remedial measures and to efficiently log such events, a transport mechanism, the Network Status Table (NST) has been defined. This system will serve for conveying diagnostic information about the consistency of all DVB/MPEG-2 multiplexes within a network.

#### A.1.2 Functionality

NSTs can be generated at any point in the transmission chain to signal missing streams (e.g. video, audio, subtitle or accompanied data) or Service Information components (e.g. NIT, SDT, EIT or TDT) within a multiplex. As the underlying concept of the NST system is to detect and signal failures at the point where they are generated, the system supervisor of the DVB/MPEG-2 encoding, multiplexing and modulation equipment should monitor the correct functioning of all equipment modules and should generate an NST in the case a service failure occurs for longer than 10 seconds.

NSTs shall then be periodically transmitted every 10 seconds until the failure is fixed. In addition to faulty equipment modules also missing input streams can be identified by subsequent modules in the transmission chain which then generate corresponding NSTs.

#### A.1.3 Syntax of the Network Status Table (NST)

The syntax of the NST is conforming to the one defined in the standard ISO/IEC 13818-1 [1] for the definition of private sections.

The Network Status Table shall be carried on **PID 0x001D** using the normal payload\_unit\_start\_indicator/pointer field mechanism described in the standard ISO/IEC 13818-1 [1]. A NST shall be inserted in maximum one Transport Stream packet resulting in a maximum table size of 183 bytes.

Structure element	No. of bits	Mnemonics
network_status_section(){		
table_id	8	uimsbf
section_syntax_indicator	1	bslbf
DVB_reserved	1	bslbf
ISO_reserved	2	bslbf
section_length	12	uimsbf
transport_stream_id	16	uimsbf
original_network_id	16	uimsbf
NST_version_number	4	uimsbf
Fault_source	12	uimsbf
Fault_type	16	uimsbf
for (i=0;i<N;i++){		
Fault_major	16	uimsbf
Fault_minor	16	uimsbf
}		
}		

**Table\_id** = 0x14

**Section\_syntax\_indicator** = 0

**DVB\_reserved** = 1

**Section\_length:** This is a 12-bit field, the first two bits of which shall be "00". It specifies the number of bytes of the section, starting immediately following the section\_length field. The section\_length shall not exceed 180 bytes so that the entire section has a maximum length of 183 bytes.

**Transport\_stream\_id:** This is a 16-bit field which serves as a label to identify the TS where the error or warning has occurred. If the TS is undefined the Transport\_stream\_id shall be 0x0000.

**Original\_network\_id:** This 16-bit field gives the label identifying the network\_id of the originating delivery system of the TS where the error or warning has occurred. If the network is undefined the Original\_network\_id shall be 0x0000.

**NST\_version\_number:** This 4-bit field identifies the version number of the NST structure. Currently, the NST\_version\_number shall be set to "0".

**Fault\_source:** This is a code that, together with the transport\_stream\_id and the original\_network\_id, identifies the origin of the failure. Fault\_source values can be defined by the operator of the TS within the ranges defined in table A.2.

**Fault\_type:** This 16-bit field identifies the basic type of errors or warnings. Only values described in table A.3 are defined. In every NST section only one Fault\_type shall be listed resulting in only one basic type of error or warning per NST.

NOTE: Table A.3 contains all TS errors as defined in ETR 290 [3].

**Fault\_major:** This 16-bit field provides more detailed information about the errors or warnings as defined by the Fault\_type. Depending on the value of the Fault\_type, the Fault\_major has different meanings. The Fault\_types for which Fault\_major are defined is given in table A.1. If for a Fault\_type no Fault\_major code is defined, the loop within the NST shall be empty.

**Fault\_minor:** This field provides additional information about the error or warning as described by the combination of Fault\_type and Fault\_major. If no Fault\_minor code is defined for a Fault\_major code, the Fault\_minor field shall be present and all bits shall be set to "1".

**Table A.1: Fault\_major and Fault\_minor for different Fault\_types**

Fault_type = 0x0003:	In case of SI_repetition_errors fault_major shall contain the corresponding table_id. Fault_minor shall be 0xFF.
Fault_type = 0x0004:	In case of EIT_errors Fault_major is defined in table A.6. Fault_minor contains the service_id of the service for which the EIT_error has occurred.
Fault_type = 0x0006:	In case of Unreferenced_PID fault_major shall contain the unreferenced PIDs. The fault_minor shall be 0xFF.
Fault_type = 0x000E:	In case of Continuity_count_error fault_major shall contain the PID of the packets, where the discontinuity has occurred. Fault_minor shall be 0xFF.
Fault_type = 0x0010:	In case of PID_error fault_major shall contain the missing PID. Fault_minor shall be 0xFF.
Fault_type = 0x0012:	In case of CRC_errors fault_major shall contain the table_ids of the table in error. Fault_minor shall be to 0xFF
Fault_type = 0x0013:	In case of PCR_accuracy_error fault_major shall contain the corresponding PID. Fault_minor shall be 0xFF.
Fault_type = 0x0015:	In case of PTS_error fault_major field shall contain the corresponding PID. Fault_minor shall be 0xFF.
Fault_type = 0x0100:	In case of missing components of a service Fault_major is equal to the service_id of this service. Fault_minor is defined in table A.4.
Fault_type = 0x0104, 0x0105, 0x0106:	If the BER is above a user defined threshold Fault_major defines the measured BER value according to table 23.
Fault_type = 0x110	If the content of a section is changed without changing its version_number, fault_major shall contain the table_ids of the of the tables in error. Fault_minor shall be 0xFF.
NOTE 1: If fault_major contains a table_id, it shall be placed in the second byte of fault_major. The first 8 bits of fault_major shall be set to "0x0".	
NOTE 2: If fault_major contains a PID, it shall be placed in the last 13 bits of fault_major. The first 3 bits of fault_major shall be set to "000".	

**Table A.2: Fault\_source**

<b>Fault_source range</b>	<b>Description</b>
0x0000	Undefined
0x0001,...,0x0064	SI-editing & controller
0x0065,...,0x01F4	Audio encoder
0x01F5,...,0x0226	Video encoder
0x0227,...,0x03B6	Data inserter
0x03B7,...,0x03E8	CA system
0x03E9,...,0x041A	Multiplexer
0x041B,...,0x044C	Re-multiplexer
0x044D,...,0x047E	Modulator
0x047F,...,0x060E	Decoder
0x060F,...,0x0640	Network termination
0x0641,...,0x09FB	DVB reserved
0x09FC,...,0x0FFF	User defined

**Table A.3: Fault\_type**

<b>Fault_type</b>	<b>Description</b>
0x0000	Undefined
0x0001	NIT_error (No. 3.1)
0x0002	SDT_error (No. 3.5)
0x0003	SI_repetition_error (No. 3.2)
0x0004	EIT_error (No. 3.6)
0x0005	Buffer_error (No. 3.3)
0x0006	Unreferenced_PID (No. 3.4)
0x0007	Empty_buffer_error (No. 3.9)
0x0008	TDT_error (No. 3.8)
0x0009	PAT_error (No. 1.3)
0x000A	CAT_error (No. 2.6)
0x000B	Data_delay_error (No. 3.10)
0x000C	TS_sync_loss (No. 1.1)
0x000D	Sync_byte_error (No. 1.2)
0x000E	Continuity_count_error (No. 1.4)
0x000F	PMT_error (No. 1.5)
0x0010	PID_error (No. 1.6)
0x0011	Transport_error (No. 2.1)
0x0012	CRC_error (No. 2.2)
0x0013	PCR_error (No. 2.3)
0x0014	PCR_accuracy_error (No. 2.4)
0x0015	PTS_error (No. 2.5)
0x0016	RST_error (No. 3.7)
0x0020	TSDT_error (for DSNG)
0x0060	Input signal missing
0x0080	Transport Stream missing
0x0100	Component of service missing
0x0104	BER before Viterbi above threshold
0x0105	BER before RS above threshold
0x0106	BER after RS above threshold
0x0110	PSI/SI section modified without changing the version_number
Other fault_type <= 0x0800	DVB reserved
Fault_type > 0x0800	User defined

NOTE: The numbers in bracket specify the corresponding TS error as defined in ETR 290 [3].

**Table A.4: Fault\_minor codes for Fault\_type = 0x0100 (Component missing)**

Fault\_major specifies the service\_id of the service with missing components.

<b>Fault_minor if Fault_type = 0x0100</b>	<b>Description</b>
0x0001	Video component missing
0x0002	Audio component missing
0x0004	EBU Teletext subtitles missing
0x0008	Associated EBU Teletext missing
0x0010	Data component missing
0x0011	ECM missing
0x0012	EMM missing
0x0020	DVB subtitling missing
0x0040	PMT missing
Other values	DVB reserved

**Table A.5: Fault\_major codes for Fault\_type = 0x0002 (SDT\_error)**

<b>Fault_major if Fault_type = 0x0002 (SDT error)</b>	<b>Description</b>
0x0001	SDT (actual TS) error
0x0002	SDT (other TS) error
Other values	DVB reserved

**Table A.6: Fault\_major codes for Fault\_type = 0x0004 (EIT\_error)**

<b>Fault_major If Fault_type = 0x0004 (EIT error)</b>	<b>Description</b>
0x0001	EIT (actual TS, p/f) error
0x0002	EIT (actual TS, schedule) error
0x0003	EIT (other TS, p/f) error
0x0004	EIT (other TS, schedule) error
Other values	DVB reserved

**Table A.7: Fault\_major codes for Fault\_type = 0x0104, 0x0105, 0x0106  
(BER Measurement)**

<b>Fault_major if Fault_type = 0x0104, 0x0105, 0x0106 (BER Measurement)</b>	<b>Description</b>
0x0000	BER > 10E-2
0x0001	10E-2 > BER > 10E-3
0x0002	10E-3 > BER > 10E-4
0x0003	10E-4 > BER > 10E-5
0x0004	10E-5 > BER > 10E-6
0x0005	10E-6 > BER > 10E-7
0x0006	10E-7 > BER > 10E-8
0x0007	10E-8 > BER > 10E-9
0x0008	10E-9 > BER > 10E-10
0x0009	10E-10 > BER > 10E-11
0x000A	10E-11 > BER > 10E-12
Other values	DVB reserved



## Annex B (informative): Examples of use for the test packets

This annex contains informative examples of testdata structures.

### B.1 Example of Testdata structure for a measurement table

Table B.1 gives an informative example of a Testdata structure including video measurement values.


**Table B.1: Example of Testdata Structure**

Structure element	No. of bits	Value
testdata_section() {		
table_id	6	0x10
priority_level	2	0x0
section_syntax_indicator	1	0x1
reserved	3	0x7
testdata_section_length	12	0x04C
user_defined	8	0x01
table_id_extension	8	0x01
reserved	2	0x3
version_number	5	0x00
current_next_indicator	1	0x1
section_number	8	0x00
last_section_number	8	0x00
reserved	4	0x00
descriptors_length	12	0x025
elementary_id_descriptor {		
descriptor_tag	8	0x40
descriptor_length	8	0x02
id_type	3	0x0
elementary_stream_pid	13	0x0100 (Video PID)
}		
content_information_descriptor {		

<b>Structure Element</b>	<b>No. of bits</b>	<b>Value</b>
descriptor_tag	8	0x42
descriptor_length	8	0x1B
ISO_639_language_code	24	"fre"
text_char {    }	8	"mesures de qualité vidéo"
}		
source_identifier_descriptor() {		
descriptor_tag	8	0x42
descriptor_length	8	0x02
for (i=0; i< descriptor_length / 2; i++) {		
source_identifier_id	16	0x0001
}		
}		
testdata_bytes {		
reduced_measurement_time_stamp	8	0x4A
sequence_length	8	0x03
number_of_measured_frames	8	0x02 (NOMF)
number_of_video_parameters	8	0x03 (NOVP)
for (i=0;i< NOMF;i++){		
for (k=0; k< NOVP; k++) {		
video_parameter(k)	32	Meas. Value in Float Format
}		
}		
}		
CRC_32	32	calculated for the whole section
}		

## B.2 Example of Testdata structure for a Testsignal table

### Generation of the PRBS test sequence

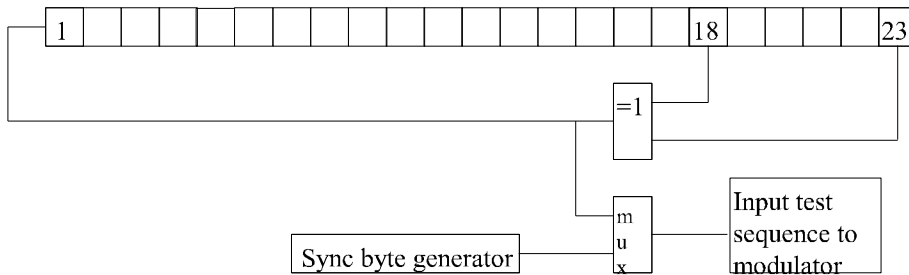

**Figure B.1: PRBS test sequence generator**

It is recommended to use the PRBS  $2^{23} - 1$  with a length of 8 388 607 bits. The input test sequence can be generated by a shift register of length 23 with suitable feedbacks. The generator polynomial shall be  $1 + x^{18} + x^{23}$ . The initialisation word in the PRBS generator is "all ones".

The PRBS data should be inserted in the testdata\_bytes. The PRBS generator is reset at the beginning of the first section related to the transmission of the PRBS.

Table B.2 gives an informative example of a Testdata structure including a PRBS test sequence.

Table B.2: Example of Testsignal insertion

Structure Element	No. of bits	Value
testdata_section() {		
table_id	6	0x11
priority_level	2	0x0
section_syntax_indicator	1	0x1
reserved	3	0x7
testdata_section_length	12	0x83D
user_defined	8	0x01
table_id_extension	8	0x01
reserved	2	0x3
version_number	5	0x00
current_next_indicator	1	0x1
section_number	8	0x00
last_section_number	8	0x00
reserved	4	0x00
descriptors_length	12	0x031
content_information_descriptor {		
descriptor_tag	8	0x41
descriptor_length	8	0x19
ISO_639_language_code	24	"eng"
text_char { }	8	"PRBS Testsequence No.1"
}		
source_identifier_descriptor() {		
descriptor_tag	8	0x42
descriptor_length	8	0x04
source_identifier_id (i=0)	16	0x0001 (Used as Uplink ID)
source_identifier_id (i=1)	16	0x1234 (Used as Source ID)
}		
time_reference_descriptor {		
descriptor_tag	8	0x44
descriptor_length	8	0x0B
reference_type	6	0x00 (Internal XCO)
precision_range	2	0x00 (No extension)
UTC_time	40	0xC079124501
}		
test_signal_descriptor {		
descriptor_tag	8	0x43
descriptor_length	8	0x02
signal_type	1	0x1 (Predefined)
intended_use	2	0x2 (Out of service)
signal_id	13	0x0002 (PRBS#1)
}		
testdata_bytes {		
for (i=0;i<2048;i++) {		
PRBS_data	8	0x00
}		
CRC_32	32	calculated for the whole section
}		

## B.3 Example of Testdata structure for a Network Status Table (NST)

Table B.3 gives an informative example of a Testdata structure, including a Network Status Table for transmission of information (e.g. failure messages) about the availability of services as well as of service components such as video, audio and subtitling and of Service Information (SI) tables.

**Table B.3: Example of Network Management Table**

Structure Element	No. of bits	Value
testdata_section() {		
table_id	6	0x14
priority_level	2	0x0
section_syntax_indicator	1	0x0
reserved	3	0x7
testdata_section_length	12	0x00C
testdata_bytes {		
transport_stream_id	16	0x0001
original_network_id	16	0x0002
NST_version_number	4	0x0
fault_source	12	0x03E9 (Multiplexer)
fault_type	16	0x0100 (Component of service missing)
fault_major	16	0x0300 (Service ID of missing service)
fault_minor	16	0x0002 (Audio component missing)
}		
}		

## B.4 Example of Testdata structure for a Reception Status Table (RST)

Table B.4 gives an informative example of a Test data structure including telemetry data tables generated by a satellite on-board multiplexer. This type of multiplexer takes TSs as inputs and outputs a single TS or several TSs containing multiple programmes. The input TSs come from different DVB-S demodulators.

Table B.4 gives information about the quality of the DVB-S signals received by the satellite, such as carrier level, frequency drift, lock status, decoding capacity overflow, etc. This information is formatted into blocks and passed into an auxiliary input of the multiplexer. The multiplexer inserts the telemetry data into the output TS two times per second.

**Table B.4: Example of Multiplex Diagnostic Table**

Structure element	No. of bits	Value
testdata_section() {		
table_id	6	0x13
priority_level	2	0x0
section_syntax_indicator	1	0x0
reserved	3	0x7
testdata_section_length	12	$N \times 8$
testdata_bytes {	$N \times 64$	N blocks of 4 words of 16 bits
}		
}		

## B.5 Example of test data structure for a Remote Control Table (RCT)

The need for remote control application is appearing in the terrestrial broadcasting environment.

It consists in controlling, from the emission site, the equipment in charge of switching from national programs to local programs, or to advertising programs.

Figure B.2 illustrates an example of a transmission chain.

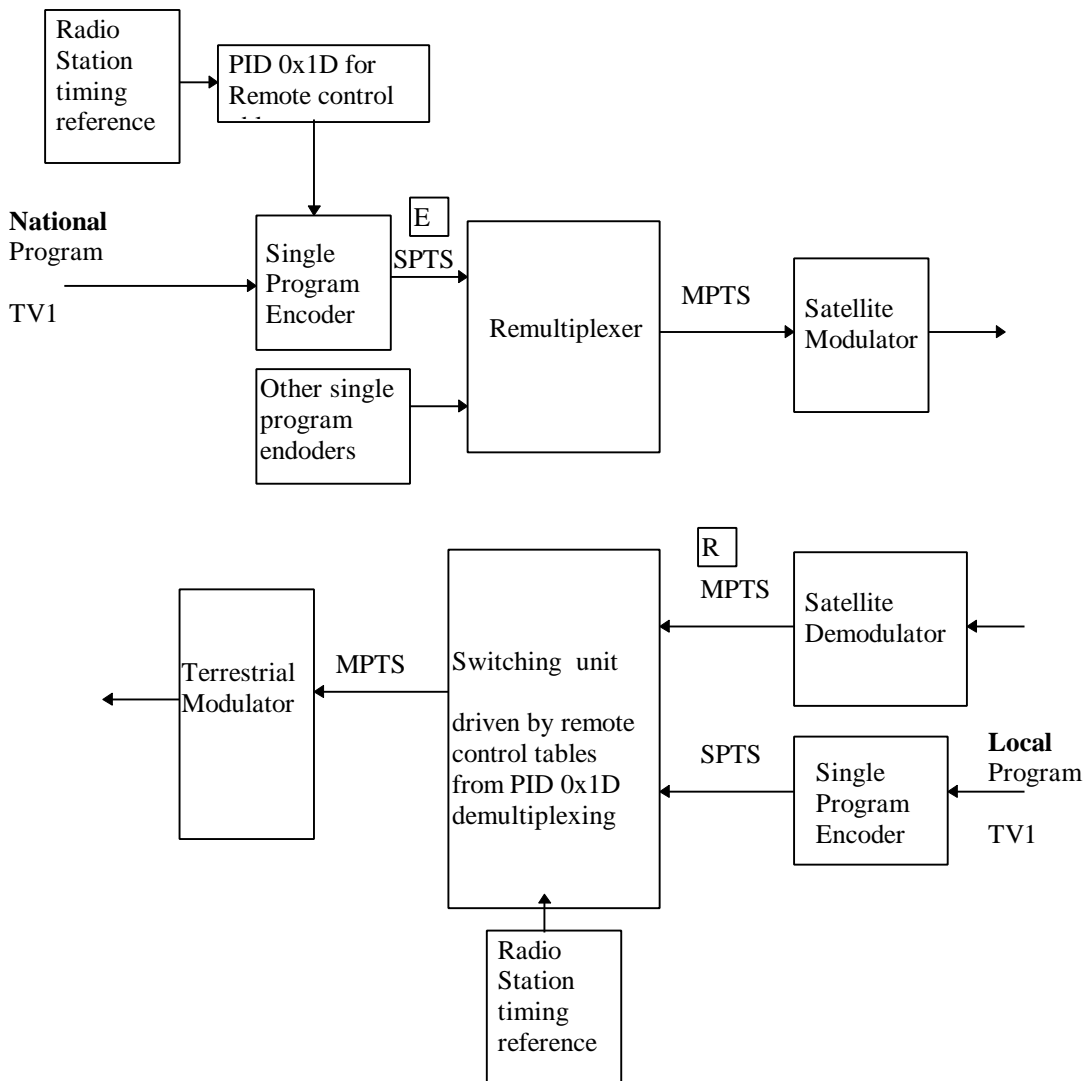


Figure B.2

#### Information to be transmitted in tables:

- one information to **announce an imminent switching**, for example, some minutes earlier;
- one information to **validate switching from national to local**;
- one information to **validate switching from local to national**;
- the **instant of switching**.
- a **time reference** used by the switching equipment to measure the transmission delay of the received video component from emission point E to reception point R. The knowledge of this delay is needed to maintain switching accuracy;
- a **PCR reference**.

The measurement of the delay shall take into account that timing jitter is inevitably created by mux and remux equipment. Moreover, the PID 0x1D timing jitter is not all correlated with the elementary stream because the paths are different on elementary streams and tables.

To solve this problem, it is proposed to link the time reference information with the video PCR (see the "reduced PCR" descriptor described in 5.4.8).

The time\_reference descriptor and the reduced PCR descriptor are sent together, for example, some minutes before switching.

In this example, the switching equipment shall know the exact type of the elementary stream (audio, video, data -> see stream\_type in PMT) for adjusting the switching criteria. Of course, the program number can be known by others means, but direct indication is a more simple and rapid way. Moreover, this is a convenient link with other signalisation.

- Program number and the PID number of the PMT are conveyed in the program\_descriptor (see 5.4.9).
- The "time reference descriptor" is used for coding the instant of switching. The precision shall be about the millisecond to be able to switch at a better accuracy than a picture duration (40 ms).

The type of the timing reference is a radio station.

**Example:**

On 93/10/13 at 12 h 45 mn 01 sec. 234 millisecc.

Switching program number 5000 (0x1388) from national to local for the video (PID = 0x100) and the audio (PID=0x101) components. The PID of the PMT is 0x900.

**table\_id** = 0x12 for remote\_control\_table

**userdefined**

8 lower bits are user defined: 0x01 = announcement of imminent switching

0x02 = switching to local

0x03 = switching to national

**table\_id\_extension** = 0x02 for switching\_system



Table B.5: Example of Remote Control Table

Structure element	No. of bits	Value
remote_section() {		
table_id	6	0x12
priority_level	2	0x0
section_syntax_indicator	1	0x1
reserved	3	0x7
testdata_section_length	12	0xXXX (tbd)
userdefined	8	0x02
table_id_extension	8	0x02
reserved	2	0x3
version_number	5	0x00
current_next_indicator	1	0x1
section_number	8	0x00
last_section_number	8	0x00
reserved	4	0x00
remote_descriptors_length	12	0x18
time_date_descriptor() {		
descriptor_tag	8	0x45
descriptor_length	8	0x08
reference_type	6	0x03
precision_range	2	0x01
UTC_time	40	0xC079124501
reserved	6	
millisecond_extension	10	0x234
}		
program_descriptor {		
descriptor_tag	8	0x46
descriptor_length	8	0x03
program_number	16	0x1388
reserved	3	
program_map_pid	13	0x0900
}		
elementary_id_descriptor {		
descriptor_tag	8	0x40
descriptor_length	8	0x02
id_type	3	0x1
elementary_stream_pid	13	0x0100 (Video PID)
}		
elementary_id_descriptor {		
descriptor_tag	8	0x40
descriptor_length	8	0x02
id_type	3	0x2
elementary_stream_pid	13	0x0101 (Audio PID)
}		
testdata_bytes {		
}		
CRC_32	32	calculated for the whole section

## Annex C (informative): Examples for data rates

In this annex C several examples are given for estimates of the data rate which needs to be reserved for certain applications of the PID 0x1D.

Error messages signalling: Approx. 200 bit/s to 2 kbit/s.

This estimate is based on the assumption that the error messages are normally contained in one TS packet and that such a packet is inserted periodically once every ten seconds up to once per second.

Test signals distribution (e.g. PRBS):  $2^{23}-1$ : 8 Mbyte, over 30 seconds approx. 270 kbit/s.

Off-line measurements: Short time 100 % of transmission capacity.

Distribution of GPS information: Around 60 kbit/s.

Distribution of measurement values: 20 to 40 kbit/s for 1 video and 1 audio stream quality analysis, for other parameters depending on repetition rate 1 to 10 kbit/s.

Control of remote equipment: Around 1 kbit/s.

**Summary: For the above listed applications the range of 200 bit/s to > 270 kbit/s is sufficient while the upper limit may only be required for comparably short periods of time.**

# History

<b>Document history</b>		
June 1998	V1.1.1	Publication