

## 20dB Line Amplifier

P/N L-TVRO20/AN-DCP

### Description


The Global Professional +20dB Line Amplifiers are high quality amplifiers (with DC Pass) for the professional user. The product is housed in our standard EMI enclosure and is CE approved.

Unit is line powered however a DC injected version is available upon request.




### Specifications

Input Frequency	950-2150MHz
Gain @ 950MHz	+20dB
Gain @ 2150MHz	+20dB
Variation	± 1dB
Max. Distortion Free Output (-35dB C/I 2 Tone)	-15dBm
Current Passing	500mA
Current Consumed	< 50mA
I/P Voltage	50 or 75W
Connector type	'N' 50Ω Female
Dimensions	56mm x 35mm x 25mm
Weight	250 grams
RoSH/WEEE Compliant	YES

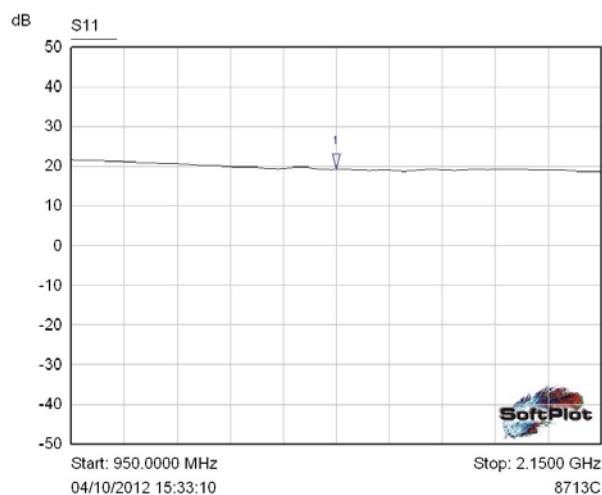

Mkr	Trace	X-Axis	Value	Notes
1 ▾	S11	1.5500 GHz	19.18 dB	

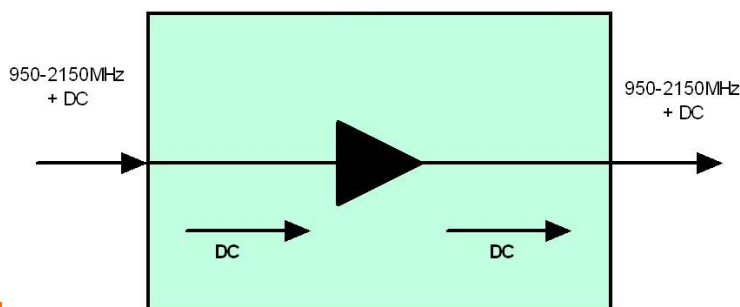

Typical Configuration

**Other Connector configurations available upon request.**